

Product Information

VESTAKEEP® 4000 CF30

CARBON FIBER-REINFORCED (30%), HIGH VISCOSITY POLYETHER ETHER KETONE



VESTAKEEP® 4000 CF30 is a carbon fiber reinforced (30%) polyether ether ketone for injection molding.

The semi-crystalline polymer features superior mechanical, thermal, and chemical resistance. Parts made from VESTAKEEP® 4000 CF30 are of low flammability.

VESTAKEEP® 4000 CF30 can be processed by common injection molding machines for thermoplastics.

We recommend a melt temperature between 380°C and 400°C during the injection molding process. The mold temperature should be within a range of 160°C to 200°C, preferably 180°C.

VESTAKEEP® 4000 CF30 is supplied as granules in 25 kg boxes with moisture-proof polyethylene liners.

Inside the original and undamaged packaging, the product has a shelf life of at least 2 years when stored in dry rooms at temperatures not exceeding 30°C.

Pigmentation may affect values.

For information about processing VESTAKEEP® 4000 CF30, please follow the general recommendations in our brochure "VESTAKEEP® PEEK Processing Guidelines."

The values presented are typical or average values, they do not constitute a specification.

FOR FURTHER INFORMATION PLEASE CONTACT US AT EVONIK-HP@EVONIK.COM OR VISIT OUR PRODUCT AT WWW.INDUSTRIAL.VESTAKEEP.COM

Key Features

Industrial Sector

Aircraft and Aerospace, Industry and Engineering, Energy, Oil and Gas

Processing

Injection molding, Extrusion

Delivery form

Pellets, Granules

Resistance to

Heat (thermal stability), Fire / burn

Additives

Carbon fibers

Mechanical properties ISO

Tensile modulus

dry

23000

Unit

MPa

Test Standard

ISO 527

Tensile strength	240	MPa	ISO 527
Stress at break	240	MPa	ISO 527
Strain at break, B	2	%	ISO 527
Charpy impact strength, +23°C	60	kJ/m ²	ISO 179/1eU
Type of failure	C	-	-
Charpy impact strength, -30°C	60	kJ/m ²	ISO 179/1eU
Type of failure	C	-	-
Charpy notched impact strength, +23°C	10	kJ/m ²	ISO 179/1eA
Type of failure	C	-	-
Charpy notched impact strength, -30°C	9	kJ/m ²	ISO 179/1eA
Type of failure	C	-	-

Mechanical properties ASTM	dry	Unit	Test Standard
tensile modulus, annealed	23304.2	MPa	ASTM D 638
Stress at break, 23°C, annealed	2	%	ASTM D 638
Strain at break, 23°C, annealed	248000	Pa	ASTM D 638

Thermal properties	dry	Unit	Test Standard
Melting temperature	340	°C	ISO 11357-1/-3
Temp. of deflection under load A, 1.80 MPa	325	°C	ISO 75-1/-2
Temp. of deflection under load B, 0.45 MPa	335	°C	ISO 75-1/-2
Vicat softening temperature A, 10 N, 50 K/h	343	°C	ISO 306
Vicat softening temperature B, 50 N, 50 K/h	340	°C	ISO 306
Coeff. of linear therm. expansion, 23°C to 55 °C, parallel	10	E-6/K	ISO 11359-1/-2
Melting Temperature	340	°C	ASTM D 3418

Physical properties	dry	Unit	Test Standard
Density	1400	kg/m ³	ISO 1183
Water absorption	0.4	%	Sim. to ISO 62

Moisture content	0.04	Gew.-%	ISO 15512
Density	1400	kg/m ³	ASTM D 792

Burning Behav.	dry	Unit	Test Standard
Burning behav. at 1.5 mm nom. thickn.	V-0	class	IEC 60695-11-10
Thickness tested	1.6	mm	-
Burning behav. at thickness h	V-0	class	IEC 60695-11-10
Thickness tested	0.8	mm	-
Oxygen index	47	%	ISO 4589-1/-2
Limiting Oxygen Index	47	%	ASTM D 2863
Glow Wire Flammability Index (GWFI)	960	°C	IEC 60695-2-12
Glow Wire Ignition Temperature (GWIT)	850	°C	IEC 60695-2-13

Electrical properties	dry	Unit	Test Standard
Volume resistivity, V	10000	Ohm*m	IEC 62631-3-1
Surface resistivity, E	1000000	Ohm	IEC 62631-3-2
Relative permittivity, 1MHz	17	-	IEC 62631-2-1
Dissipation factor, 1MHz	230	E-4	IEC 62631-2-1

Rheological properties	dry	Unit	Test Standard
Melt volume-flow rate, MVR	20	cm ³ /10min	ISO 1133
Temperature	380	°C	-
Load	21.6	kg	-
Melt volume-flow rate, MVR	23	cm ³ /10min	ISO 1133
Temperature	400	°C	-
Load	21.6	kg	-
Molding shrinkage, parallel	0	%	ISO 294-4, 2577
Molding shrinkage, normal	0.4	%	ISO 294-4, 2577

Test specimen production

Injection Molding, melt temperature

dry
Unit
Test Standard
420

°C

ISO 294

Injection Molding, mold temperature

200

°C

ISO 294

Injection Molding, injection velocity

200

mm/s

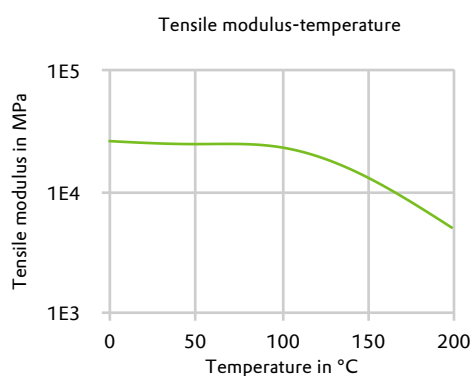
ISO 294

Injection Molding, pressure at hold

120

MPa

ISO 294

Diagrams
Tensile modulus-temperature

Characteristics
Applications

Electrical and Electronical, Encapsulation

Chemical Resistance

General chemical resistance

Color

Natural color

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass) (23°C)
- ✓ Citric Acid solution (10% by mass) (23°C)
- ✓ Hydrochloric Acid (36% by mass) (23°C)
- ✗ Nitric Acid (40% by mass) (23°C)
- ✓ Sulfuric Acid (5% by mass) (23°C)
- ✓ Chromic Acid solution (40% by mass) (23°C)

Bases

- ✓ Sodium Hydroxide solution (35% by mass) (23°C)
- ✓ Sodium Hydroxide solution (1% by mass) (23°C)
- ✓ Ammonium Hydroxide solution (10% by mass) (23°C)

Alcohols

- ✓ Isopropyl alcohol (23°C)
- ✓ Methanol (23°C)
- ✓ Ethanol (23°C)

Hydrocarbons

- ✓ n-Hexane (23°C)
- ✓ Toluene (23°C)
- ✓ iso-Octane (23°C)

Ketones

- ✓ Acetone (23°C)

Ethers

- ✓ Diethyl ether (23°C)

Mineral oils

- ✓ SAE 10W40 multigrade motor oil (23°C)
- ✓ Insulating Oil (23°C)

Standard Fuels

- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23°C)
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23°C)
- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (23°C)

Salt solutions

- ✓ Sodium Chloride solution (10% by mass) (23°C)
- ✓ Sodium Hypochlorite solution (10% by mass) (23°C)
- ✓ Sodium Carbonate solution (20% by mass) (23°C)
- ✓ Sodium Carbonate solution (2% by mass) (23°C)
- ✓ Zinc Chloride solution (50% by mass) (23°C)

Other

- ✓ Ethyl Acetate (23°C)
- ✓ Hydrogen peroxide (23°C)
- ✓ Ethylene Glycol (50% by mass) in water (108°C)
- ✓ Water (23°C)
- ✓ Deionized water (90°C)

Rheological calculation properties

	dry	Unit	Test Standard
Min. mold temperature	160	°C	-
Max. mold temperature	200	°C	-
Min. melt temperature	380	°C	-
Max. melt temperature	400	°C	-

This information and all technical and other advice are based on Evonik's present knowledge and experience. However, Evonik assumes no liability for such information or advice, including the extent to which such information or advice may relate to third party intellectual property rights. Evonik reserves the right to make any changes to information or advice at any time, without prior or subsequent notice. Evonik disclaims all representations and warranties, whether express or implied, and shall have no liability for, merchantability of the product or its fitness for a particular purpose (even if Evonik is aware of such purpose), or otherwise. EVONIK SHALL NOT BE RESPONSIBLE FOR CONSEQUENTIAL, INDIRECT OR INCIDENTAL DAMAGES (INCLUDING LOSS OF PROFITS) OF ANY KIND. It is the customer's sole responsibility to arrange for inspection and testing of all products by qualified experts. Reference to trade names used by other companies is neither a recommendation nor an endorsement of the corresponding product, and does not imply that similar products could not be used.

* is a registered trademark of Evonik Industries AG or one of its subsidiaries

Evonik Operations GmbH
Smart Materials
High Performance Polymers
 45772 Marl / Germany
 Tel: +49 2365 49-9878
evonik-hp@evonik.com
www.plastics-database.com